



FOTON

AUMARK S

## AUMARK S 9D15 Tipper



\*Overseas model shown.

### WEIGHT RATINGS

GVM	8,850kg
GCM	12,350kg
TOWING CAPACITY <sup>1</sup>	3,500kg

### ENGINE

POWER	115kW @ 2600rpm
TORQUE	550Nm @ 1100-1900rpm

### TRANSMISSION

6 Speed Manual Transmission (MT)
6 Speed Automated Manual Transmission (AMT)

### SAFETY SYSTEMS

Anti-lock Braking System	(ABS)	●
Electronic Stability Program	(ESP)	●
Lane Departure Warning	(LDW)	●
Anti-Slip Regulation	(ASR)	●
Hill Start Assist	(HSA)	●
Electronic Brakeforce System	(EBS)	●
Autonomous Emergency Braking	(AEB)	●
Forward Collision Warning	(FCW)	●
Auto Vehicle Hold	(AVH)	●
LED Daytime Running Lights	(DRL)	●

### SAFETY SYSTEMS


Dusk Sensing Head Lights	●
Reverse Sensor	●
Reverse Camera	●
Reverse Buzzer	●
Remote Central Locking	●
Driver Airbag	●
Passenger Airbag	●
Cab Strength - ECE R29	●
Front Fog Lamp With Cornering Function	●

- STANDARD
- OPTIONAL
- UNAVAILABLE

1. Maximum Braked Towing Capacity.

ENGINE	
Model	Cummins F3.8EVIE156
Type	4 cylinder inline common rail diesel engine
Displacement	3760cc
Bore x Stroke	102 x 115mm
Compression Ratio	16.8 : 1

PERFORMANCE	
Maximum Power	115kW @ 2600rpm
Maximum Torque	550Nm @ 1100-1900rpm
Gradability	>35%
Fuel Injection	Electronically Controlled High Pressure Common Rail
Emission Standard	Euro 6e
Emission Technique	SCR+DOC+DPF

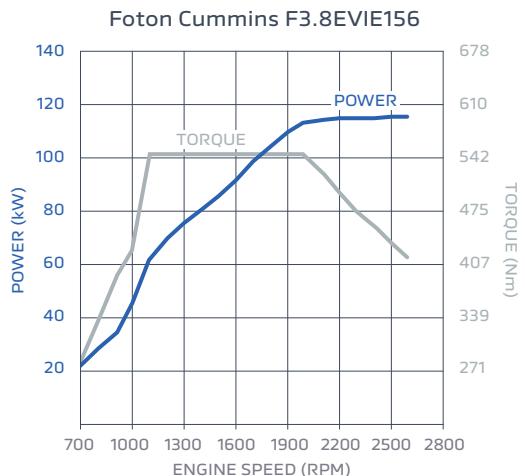

TRANSMISSION		MT		AMT	
Description	ZF 6S558TO		ZF 6AU558TO		
Number of Gears	6		6		
Selectable Gear Ratio	1st	6.198	1st	6.198	
	2nd	3.287	2nd	3.287	
	3rd	2.025	3rd	2.025	
	4th	1.371	4th	1.371	
	5th	1	5th	1	
	6th	0.78	6th	0.78	
	Reverse	5.681	Reverse	5.681	
PTO Provision		●		●	
Driving Modes	Eco	●		●	
	Power	●		●	
	Snow	—		●	

CLUTCH		MT		AMT	
Type	Dry Single Plate Diaphragm Spring Clutch	Dry Single Plate Diaphragm Spring Clutch			
Actuation	Hydraulic		Electronic/Hydraulic		
Diameter	362mm		362mm		

STEERING	
Type	Closed Recirculating Ball
Power Assist Type	Hydraulic Boost
Turning Radius	≤17m

SUSPENSION		
Type	Front	Multi-leaf Spring with Stabiliser Bar
	Rear	Multi-leaf Spring with Stabiliser Bar
Number of Leaf Springs	Front	3
	Rear	4+2
2-way (Front & Rear) Shock Absorbers		●

BRAKES		
Front	Type	Disc
	Diameter	330mm
Rear	Type	Disc
	Diameter	330mm
Parking Brake		Electronically Controlled Airbrake

AXLES		
Front Axle	Type	Forged & Stamped I-Beam
	Capacity	2,850kg
Rear Axle	Type	Banjo (Stamped & Welded Housing)
	Capacity	6,000kg
Rear Axle Ratio		4.3:1

WHEELS & TYRES		
Wheel Type		Aluminium Alloy
Front	Wheel Size (Diameter x Width)	17.5" x 6"
	Tires (Width, Profile/Diameter/Load Rating)	215/75R17.5 126/124M
	Steer Axle Tyre Capacity	3,400kg
Rear	Wheel Size (Diameter x Width)	17.5" x 6"
	Tires (Width, Profile/Diameter/Load Rating)	215/75R17.5 126/124M
	Steer Axle Tyre Capacity	6,800kg
Number of Studs		6
Spare Wheel Carrier		●

ELECTRICAL		
System Voltage		24V (100Ah)
Number of Batteries		2 connected in series
Alternator		70amp
Starter Motor		3.6kW

FUEL TANK		
Fuel Tank Material		Aluminium Alloy
Fuel Tank Capacity		160L

● STANDARD  
○ OPTIONAL  
— UNAVAILABLE

EXTERIOR FEATURES		
Forward Control Tilt Cab	●	
Silver-coloured Grille	●	
Lights	Halogen Headlights	●
	Halogen Side Indicators on Doors	●
	Halogen Tail Light Combination	●
	LED roof marker lamps	●
Mirrors	Exterior Mirrors x 5 (including Close proximity, Front Lower, Wide Angle)	●
	Heated Exterior Mirrors	●
	Power Mirror Adjustment	●
Two Speed Wipers		

CHASSIS FRAME	
Type	Riveted Longitudinal Beam High Strength Steel
Side Rail Dimensions	214x65x5mm (LxWxH)
Rear Frame Width	800mm

CABIN INTERIOR		
Seating	Capacity x 3	●
	3 Point ELR Outboard Seat Belts with Pretensioners	●
	Centre Seat Lap Seat Belt	●
Seat Adjustment	4-way Manual Driver's	●
	2-way Manual Passenger	●
Infotainment Unit	7-Inch Touchscreen	●
	AM/FM Radio	●
	Reversing Camera	●
	Bluetooth® Handsfree Mobile Communication <sup>1</sup>	●
	USB-A Port	●
	SD Card Slot	●
	AUX Port	●
Storage	Foldable Centre Seat	●
	Storage Box and x 2 Cupholders	●
	Center Console with 3 Cupholders	●
	Driver & Passenger Side Pocket	●
	Door Pockets	●
	Driver & Passenger Overhead Net Shelf	●
	Back of Centre Seat	●
	Aluminium Lock Box Behind Cab	●
Height & Telescopic Manual Adjustable Steering Wheel		
Single Zone Manual Air Conditioning		
Power Windows		
24V Power Socket - Centre Console		
Halogen Reading Lights on Roof		
Door & Roof Pillar Mounted Entry Assist Grips		
Wireless Controller (Lift/Drop Tipper Bed)		

DIMENSIONS (mm)	
Cab Type	Single Wide
Cab Width	2,060
Overall Length	6,921
Overall Width	2,365
Overall Height	2,450
Wheelbase	3,800
Front Track	1,730
Rear Track	1,615
Front Overhang	1,110±10
Rear Overhang	1,600±10
Minimum Ground Clearance	160

WEIGHTS (kg) <sup>2</sup>	
Tare Mass	4,170
Gross Vehicle Mass (GVM)	8,850
Gross Combined Mass (GCM)	12,350
Maximum Braked Towing Capacity	3,500

MODEL CODES	CODE
Aumark S 9D15 MT Tipper	S0915MCWQT
Aumark S 9D15 AMT Tipper	S0915ACRQT

1. Compatible Apple® or Android™ device required. 2. All weights are +/- 3%.

FOTON Automotive Australia offers this information as a general guide to product specifications. All data is believed to be correct as at September 2025, however, as development is an ongoing process, changes may occur from time to time which will not necessarily be reflected herein. Therefore, FOTON Automotive Australia reserves the right to change specifications without notice. Accordingly, this information should not be regarded as an infallible guide to correct specifications, nor does it constitute an offer for sale of any particular vehicle. Whilst all care has been taken to provide you with information in regards to the general use of FOTON products, you should not rely solely on the information provided in this brochure. Dealers are not agents of FOTON Automotive Australia and have absolutely no authority to bind FOTON Automotive Australia by an express or implied undertaking or representation. Inchcape Automotive Distribution Australia Pty Ltd ABN 72 637 080 927 trading as FOTON Automotive Australia.

● STANDARD  
○ OPTIONAL  
— UNAVAILABLE