





HI-808-NO

overseas model shown

- 01. dimensions
- 02. battery and engine
- 03. equipment and options

01. dimensions

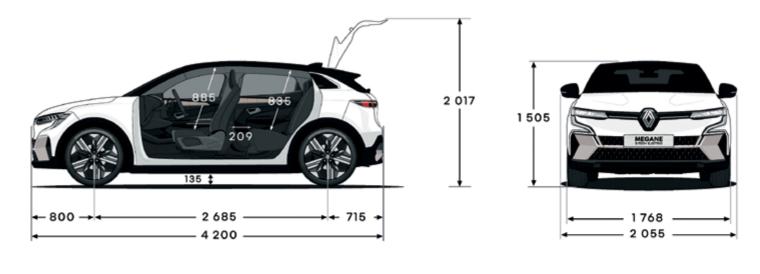

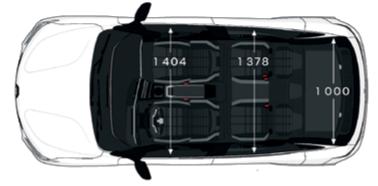



boot volume (litres)	
min. boot volume	440
max. boot volume	1,332

02. battery and engine

TECHNO EV60 60kWh

Number of seats5Battery top (kMh)60Battery top (kMh)60Sattery top (kMh)60Sattery top (kMh)400Cortified driving range in WLTP cycle (km) ^{III} 737 (1-4 5)Cartified driving range in WLTP cycle (km) ^{III} 156Cartified driving range in WLTP cycle (km) ^{III} 156Cartified driving range in WLTP cycle (km) ^{III} 156Cartified driving range in WLTP cycle (km) ^{III} 156Elociti o angine tochnologyynohronous with wound ractorMaximup power (kW)160Maximup power (kW)160Parformane O-JOCkm/h (sec)74ChargerAC adaptive single phose up of 74kW and DC up to 13kWChargerAC adaptive single phose Up of 74kW and DC up to 13kW23kW doenstio socket (10A single-phose) (0-100%) ^{III} approximately 30 hrs 3024kW doenstio socket (10A single-phose) (0-100%) ^{III} approximately 94 hrs 1523kW doenstio point (12A three phose) (0-100%) ^{III} approximately 94 hrs 1523kW doenstio point (12A three phose) (0-100%) ^{III} approximately 94 hrs 1524kW doenstio point (12A three phose) (0-100%) ^{III} approximately 94 hrs 1524kW doenstio point (12A three phose) (0-100%) ^{III} approximately 94 hrs 1525kW doensting point (12A three phose) (0-100%) ^{III} approximately 94 hrs 1525kW doensting point (12A three phose) (0-100%) ^{III} approximately 94 hrs 1525kW doensting point (12A three phose) (0-100%) ^{III} approximately 30 min25kW doensting point (12A three phose) (0-100%) ^{III} approximately 30 min <th>technical specifications</th> <th></th>	technical specifications		
Battery technology Ilthium-ion Total voltage 400 Bottery veight (kg) 394 (+/-5) Certified driving range in WLTP oyole (km) th 166 Electric engine technology synchronus with wound rotor Maximum power (kW) 160 Maximum torque (Nm) 300 Performance 0-000km/h (sec) 74 charging ACadpative single phases up to 7.4KW and DOu pto 180KW 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th approximately 9 hrs 15 2.8KW domestic ocket (10A single-phase) (0-100%) th	Number of seats	5	
Turn voltage 400 Battery weight (kg) 394 (+/- 6) Cortified driving range in WLP eyole (km) ¹⁰ 454 Cortified driving range in WLP eyole (km) ¹⁰ 156 Cortified driving range in WLP eyole (km) ¹⁰ 160 Maximum prover (kM) 160 Maximum prover (kM) 160 Maximum torque (km) 300 Performance 0-100 km/h (keo) 7.4 charging AC adaptive single phase up to 7.4kW and DC up to 130 kW Charger AC adaptive single phase up to 7.4kW and DC up to 130 kW 2.8kW domestic okarging point (32.4 hree-phase) (0-100%) ¹⁰ opproximately 9 hrs 15 2.8kW domestic okarging point (32.4 hree-phase) (0-100%) ¹⁰ opproximately 9 hrs 15 2.8kW domestic okarging point (32.4 hree-phase) (0-100%) ¹⁰ opproximately 9 hrs 15 2.8kW domestic okarging point (15-80%) ¹⁰ opproximately 9 hrs 15 2.8kW domestic okarging point (15-80%) ¹⁰ opproximately 9 hrs 15 2.8kW domestic okarging point (15-80%) ¹⁰ opproximately 9 hrs 15 2.8kW domestic okarging point (15-80%) ¹⁰ outomatio Searbox single-speed reduction gear Type outomatio <	Battery type (kWh)	60	
Batery wight (kg) 394 (+/- 5) Certified driving range in WLTP cycle (km/) th 454 Certified driving range in WLTP cycle (km/) th 155 Electric engine technology synchronous with wound rotor Maximum power (kw) 160 Maximum power (km) 300 Performence 0-100km/h (sec) 7.4 chargin approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 hrs 30 2.8kW domestic ocket (10A single-phase) (0-100%) ^[th] approximately 30 min gearbox approximately 30 min gearbox single-speed reduction gear Type automatic Type automatic Bear dox single-speed reduction gear Type automatic Turning circle between kerbs (m) 10.56	Battery technology	lithium-ion	
Dertified driving range in WLTP cycle (km) ^{III} 454 Certified consumption in combined cycle (kM/km) ^{III} 156 Electric engine technology synchronous with wound rotor Maximum power (kW) 160 Maximum torque (Nm) 300 Performance 0-100km/h (sec) 7.4 charging Charger Charger AC adaptive single phase up to 7.4kW and DC up to 130kW 2.3kW domestic ocket (10.4 single-phase) (0-100%) ^{IIII} approximately 30 hrs 30 2.4kW domestic ocket (10.4 single-phase) (0-100%) ^{IIII} approximately 30 hrs 15 2.3kW domestic ocket (10.4 single-phase) (0-100%) ^{IIII} approximately 30 hrs 15 2.4kW domestic ocket (10.4 single-phase) (0-100%) ^{IIII} approximately 30 hrs 15 2.4kW domestic ocket (10.4 single-phase) (0-100%) ^{IIII} approximately 30 hrs 15 2.4kW domestic ocket (10.4 single-phase) (0-100%) ^{IIII} approximately 30 min gearbox approximately 30 min Gearbox single-speed reduction gear Type automatio steering utomatio Type automatio steering Utomatio Turing circle between karbs (m) 10.56 Number of steering wheel turns (lock to lock) 2.3 wheel and type 20" alloy Tyre dimensions 215/45 R20	Total voltage	400	
Certified consumption in combined cycle (Wh/km) ^{III} 156Electric engine technologysynchronous with wound rotorMaximum prower (kW)160Maximum traque (Nm)300Performance 0-100km/h (sec)7.4oharginAC adaptive single phase up to 7.4kW and DC up to 130kW2.3kW domestic ocket (IOA single-phase) (0-100%) ^{III} approximately 30 hrs 302.3kW domestic ocket (IOA single-phase) (0-100%) ^{IIII} approximately 9 hrs 152.3kW domestic ocket (IOA single-phase) (0-100%) ^{IIII} approximately 9 hrs 152.3kW domestic ocket (IOA single-phase) (0-100%) ^{IIIII} approximately 9 hrs 152.3kW domestic ocket (IOA single-phase) (0-100%) ^{IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII}	Battery weight (kg)	394 (+/- 5)	
Electric engine technology synchronous with wound rotor Maximum power (kW) 160 Maximum torque (Nm) 300 Performance 2100km/h (sec) 7.4 charging AC adaptive single phase up to 7.4kW and DC up to 130kW 2.3kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.4 single-phase) (0-100%) ^(P) approximately 30 hrs 30 7.4kW domestic socket (10.5k automatic 8earbay automatic 8earbay yes (electric) 10.5c 10.5c Number of steering wheel turns (lock to lock) 2.3 Wheel rims 20° alloy Tyre dimensions 216/45 R20 95T Dratt, yentliated disc (VD) - Ø (mm) VD Ø3	Certified driving range in WLTP cycle (km) ⁽¹⁾	454	
Maximum power (kW) 160 Maximum power (kW) 300 Performance 0-100 km/h (sec) 7.4 charging 7.4 Charger AC adaptive single phase up to 7.4kW and DC up to 130kW 2.3kW domestic ooket (10A single-phase) (0-100%) ^{r0} approximately 30 hrs 30 7.4kW domestic ooket (10A single-phase) (0-100%) ^{r0} approximately 9 hrs 15 2.3kW domestic ooket (10A single-phase) (0-100%) ^{r0} approximately 9 hrs 15 2.3kW domestic obarging point (32A single-phase) (0-100%) ^{r0} approximately 9 hrs 15 2.3kW domestic obarging point (32A single-phase) (0-100%) ^{r0} approximately 30 min gearbox approximately 9 hrs 15 3.0kW DC rapid charging point (15-80%) ^{r0} approximately 30 min gearbox single-speed reduction gear Type automatio steering yes (electric) Turning circle between kerbs (m) 10.56 Number of steering wheel turns (lock to lock) 2.3 wheel and tyres 216/45 R20 v6T Wheel rins 216/45 R20 v6T Tyre dimensions 216/45 R20 v6T weight (ing)^h VD 0292	Certified consumption in combined cycle (Wh/km) ⁽¹⁾	156	
Maximum torque (Nm)300Performance 0-100km/h (seo)74oharginAC adoptive single phase up to 7.4kW and DC up to 130kWChargerAC adoptive single phase up to 7.4kW and DC up to 130kW2.3kW domestic obcket (10A single-phase) (0-100%) ⁽²¹ approximately 30 hrs 307.4kW domestic obcrajing point (32A single-phase) (0-100%) ⁽²¹ approximately 9 hrs 1530kW DC rapid oberging point (15-80%) ⁽²¹ approximately 30 mingearboxsingle-speed reduction gearTypeautomaticsteringutomaticPower assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheel and type20° alloyTyre dimensions20° alloyTyre dimensions216/45 R20 967braking20° alloyTyre dimensionsVD 2820weight (kg) ^A1642Cross whicle weight1642Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload450Payload750	Electric engine technology	synchronous with wound rotor	
Performance 0-100km/h (sec) 74 charging 7. AC adaptive single phase up to 7.4k wind DC up to 130kW 7.2 23kW domestic socket (10.4 single-phase) (0-100%) ⁽²⁾ 7.2 23kW domestic obarging point (32.4 single-phase) (0-100%) ⁽²⁾ 7.2 23kW doraging point (32.4 three-phase) (0-100%) ⁽²⁾ 7.2 22kW doraging point (32.4 three-phase) (0-100%) ⁽²⁾ 7.2 22kW doraging point (32.4 three-phase) (0-100%) ⁽²⁾ 7.2 22kW doraging point (15-80%) ⁽²⁾ 7.2 2	Maximum power (kW)	160	
charging AC adaptive single phase up to 7.4kW and DC up to 130kW 2.3kW domestic socket (10A single-phase) (0-100%) ⁽²⁷⁾ approximately 30 hrs 30 7.4kW domestic oharging point (32A single-phase) (0-100%) ⁽²⁷⁾ approximately 9 hrs 15 2.2kW charging point (32A three-phase) (0-100%) ⁽²⁷⁾ approximately 9 hrs 15 2.3kW dor capid charging point (15-80%) ⁽²⁷⁾ approximately 9 hrs 15 2.3kW DC rapid charging point (15-80%) ⁽²⁷⁾ approximately 30 min gearbox single-speed reduction gear Cype automatic Steering utomatic Power assisted yes (electric) Turning circle between kerbs (m) 10.56 Number of steering wheel turns (lock to lock) 2.3 wheel and tyres 20° alloy Tyre dimensions 215/45 R20 95T braking 216/45 R20 95T Front: ventilated disc (VD) Ø (mm) VD Ø320 Rear: ventilated disc (VD) Ø (mm) VD Ø320 Poyload 1642 <	Maximum torque (Nm)	300	
ChargerAC adaptive single phase up to 7.4kW and DC up to 130kW2.3kW domestic socket (10.4 single-phase) (0-100%)12approximately 30 hrs 307.4kW domestic socket (10.4 single-phase) (0-100%)12approximately 9 hrs 1522kW oharging point (32.4 single-phase) (0-100%)12approximately 9 hrs 1523kW oharging point (32.4 single-phase) (0-100%)12approximately 30 ningearboxapproximately 30 ningearboxsingle-speed reduction gearTypeautomaticsteeringautomaticPower assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3Wheel rims20' alloyTyre dimensions215/45 R20 95Tbrakel20' alloyTyre dimensionsVD Ø320Rear: ventilated disc (VD) 0 (mm)VD Ø320Rear: ventilated disc (VD) - 0 (mm)1642Gross vehicle weight1642Gross vehicle weight2169Payload450Maximut towing weight, braked900Maximut towing weight, unbraked900	Performance 0-100km/h (sec)	7.4	
2.8kW domestic socket (10A single-phase) (0-100%) ^{[21} approximately 30 hrs 307.4kW domestic charging point (32A single-phase) (0-100%) ^{[21} approximately 9 hrs 1522kW charging point (32A three-phase) (0-100%) ^{[21} approximately 9 hrs 1530kW DC rapid charging point (32A three-phase) (0-100%) ^{[21} approximately 9 hrs 1530kW DC rapid charging point (15-80%) ^{[22} approximately 9 hrs 1530kW DC rapid charging point (15-80%) ^{[22} approximately 30 mingearboxsingle-speed reduction gearTypeautomaticgearboxgearboxTypeautomaticsteeringyes (electric)Power assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres216/45 R20 95TbrakingTre turned to see (VD) Ø (mm)Tyre dimensions216/45 R20 95TbrakingVD Ø320Rear: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) Ø (mm)1642Gross vehicle weight1642Gross vehicle weight2169Payload450Maximu towing weight, braked900Maximu towing weight, unbroked750	charging		
7.4kW domestic charging point (32A single-phase) (0-100%) ⁽²⁰⁾ approximately 9 hrs 1522kW charging point (32A three-phase) (0-100%) ⁽²⁰⁾ approximately 30 mingearboxapproximately 30 mingearboxsingle-speed reduction gearTypeautomaticsteeringutomaticPower assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres20" alloyTyre dimensions20" alloyTyre dimensions20" alloyTrensitieted disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) Ø (mm)1642Gross vehicle weight2169Payload450Maximu towing weight, braked900Maximu towing weight, unbraked750	Charger	AC adaptive single phase up to 7.4kW and DC up to 130kW	
22kW charging point (32 k three-phase) (0-100%) ^[2] approximately 9 hrs 15130kW DC rapid charging point (15-80%) ^[2] approximately 30 mingearboxsingle-speed reduction gearGearboxautomaticSteeringautomaticPower assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (look to look)2.3wheels and tyres20" alloyWheel rins20" alloyTyre dimensions215/45 R20 95Tbraking10.56Trur ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) Ø (mm)1642Gross vehicle weight1642Gross vehicle weight2169Poyload450Maximum towing weight, unbraked900Maximum towing weight, unbraked750	2.3kW domestic socket (10A single-phase) (0-100%) ⁽²⁾	approximately 30 hrs 30	
N30kW DC rapid charging point (15-80%) ^[21] approximately 30 mingearboxsingle-speed reduction gearGearboxautomaticTypeautomaticsteeringuPower assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres20" alloyWheel rims20" alloyTyre dimensions20" alloybrakingVD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)1642Gross vehicle weight1642Gross vehicle weight, braked900Maximun towing weight, unbraked900	7.4kW domestic charging point (32A single-phase) (0-100%) ⁽²⁾	approximately 9 hrs 15	
gearbox single-speed reduction gear Type automatic steering Power assisted yes (electric) Turning circle between kerbs (m) 10.56 Number of steering wheel turns (lock to lock) 2.3 wheels and tyres 20° alloy Tyre dimensions 20° alloy Tyre dimensions 215/45 R20 95T braking VD Ø320 Rear: ventilated disc (VD) Ø (mm) VD Ø320 Marie (MD) VD Ø320 Rear: ventilated disc (VD) Ø (mm) VD Ø320 Rear: ventilated disc (VD) Ø (mm) YD Ø30	22kW charging point (32A three-phase) (0-100%) ⁽²⁾	approximately 9 hrs 15	
Gearboxsingle-speed reduction gearTypeautomaticsteeringyes (electric)Power assistedyes (electric)Turning oirole between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres20° alloyWheel rims20° alloyTyre dimensions215/45 R20 95TbrakingVD Ø320Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^1642Gross vehicle weight2169Payload450Maximum towing weight, unbraked750	130kW DC rapid charging point (15-80%) ⁽²⁾	approximately 30 min	
TypeautomaticsteeringPower assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres20" alloyWheel rims20" alloyTyre dimensions215/45 R20 95TbrakingVD Ø320Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weight (kg) ^A1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	gearbox		
steering Power assisted yes (electric) Turning airale between kerbs (m) 10.56 Number of steering wheel turns (look to look) 2.3 wheels and tyres 20" alloy Wheel rims 20" alloy Tyre dimensions 215/45 R20 95T braking VD Ø320 Rear: ventilated disc (VD) Ø (mm) VD Ø320 Rear: ventilated disc (VD) - Ø (mm) VD Ø292 weights (kg) ^^ 1642 Gross vehicle weight 2169 Payload 450 Maximum towing weight, braked 900 Maximum towing weight, unbraked 750	Gearbox	single-speed reduction gear	
Power assistedyes (electric)Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres20° alloyWheel rims20° alloyTyre dimensions215/45 R20 95TbrakingVD Ø320Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Туре	automatic	
Turning circle between kerbs (m)10.56Number of steering wheel turns (lock to lock)2.3wheels and tyres20" alloyWheel rims20" alloyTyre dimensions215/45 R20 95TbrakingFront: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø320weights (kg) ^^Tare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	steering		
Number of steering wheel turns (lock to lock)2.3wheels and tyres20" alloyWheel rims20" alloyTyre dimensions215/45 R20 95TbrakingVD Ø320Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^1642Gross vehicle weight1642Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Power assisted	yes (electric)	
wheels and tyresWheel rims20" alloyTyre dimensions215/45 R20 95TbrakingVD Ø320Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^VD Ø292Tare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Turning circle between kerbs (m)	10.56	
Wheel rims20" alloyTyre dimensions215/45 R20 95TbrakingFront: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^Tare weight1642Gross vehicle weight1642Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Number of steering wheel turns (lock to lock)	2.3	
Tyre dimensions215/45 R20 95TbrakingVD Ø320Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^1642Tare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	wheels and tyres		
brakingFront: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^VDTare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Wheelrims	20" alloy	
Front: ventilated disc (VD) Ø (mm)VD Ø320Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^Tare weightTare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Tyre dimensions	215/45 R20 95T	
Rear: ventilated disc (VD) - Ø (mm)VD Ø292weights (kg) ^^Tare weightTare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	braking		
weights (kg) ^^ Tare weight 1642 Gross vehicle weight 2169 Payload 450 Maximum towing weight, braked 900 Maximum towing weight, unbraked 750	Front: ventilated disc (VD) Ø (mm)	VD Ø320	
Tare weight1642Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Rear: ventilated disc (VD) - Ø (mm)	VD Ø292	
Gross vehicle weight2169Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	weights (kg) ^^		
Payload450Maximum towing weight, braked900Maximum towing weight, unbraked750	Tare weight	1642	
Maximum towing weight, braked900Maximum towing weight, unbraked750	Gross vehicle weight	2169	
Maximum towing weight, unbraked 750	Payload	450	
	Maximum towing weight, braked	900	
Maximum towing weight, download 75	Maximum towing weight, unbraked	750	
	Maximum towing weight, download	75	

(1) based on WLTP (Worldwide Harmonised Light-Duty Vehicles Test Procedure) static laboratory combined average city and highway cycle test, which measures energy consumption, range and emissions in passenger vehicles, designed to provide figures closer to real-world driving behaviour. Real life driving results will vary depending on driving style, type of journey, battery age and condition, use of vehicle features (such as heating and air conditioning), as well as operating, environmental and climate conditions. (2) the charging time and driving range recovered depend on the temperature, wear of the battery, power delivered by the charging point, your driving style and your charge level. A^ The weights indicated for towing capacities are for a basic vehicle without options. These may vary depending on your vehicle's equipment, accessories, passengers & any cargo on board. Please consult your Renault Dealership or the vehicle's owner handbook to confirm your towing requirements to ensure compliance with approved towing limits.

03. equipment and options

TECHNO EV60 60kWh

	TECHNO EV60 60kWh
passove safety	
Driver & front passenger airbags	•
Driver & front passenger chest side airbags	
Front centre airbag	
Front & rear curtain airbags	•
Seat belt warning light & tone for driver & all passengers	•
Height-adjustable front and rear headrests	•
ISOFIX child seat anchorage points on the rear outermost seats	•
3 Child seat anchorage points for rear seats	•
Child safety lock on rear doors	•
	•
Rear fog light	•
Pedestrian warning sound (3 available sounds)	•
active safety	
Electronic Stability Control (ESC)	•
Anti-lock Braking System (ABS)	•
Emergency Brake Assist (EBA)	
Active emergency braking with pedestrian and cyclist detection and junction assist	
Safe following distance warning	•
Lane departure warning	•
Lane keep assist	•
Blind spot detection with emergency intervention	•
Cruise control and speed limiter	•
Adaptive cruise control with stop & go	•
Traffic sign recognition with adjustment of cruise control speed based on recognised speed	•
Driver attention alert	•
Front/rear/side parking sensors	•
Rear-view camera	•
Smart rear-view mirror with camera	•
Rear cross traffic alert	•
Active rear emergency braking	•
Hill start assist	•
Tyre pressure monitor	•
lighting	
100% LED adaptive front headlights: Renault LED Pure Vision with fog light function	•
LED daytime running lights with lighting signature	•
3D rear lighting signature with moiré effect	•
Puddle lights with Renault logo projection	•
connectivity & multimedia	
12.3-inch high-definition digital driver instrument cluster	•
9-inch OpenR: multimedia system	•
Digital radio	•
	•
Bluetooth® phone pairing with audio streaming ^ Wireless Android Auto™ and Apple CarPlay™ ^	
	-
Wireless smartphone charger ^ Arkamys© Auditorium sound system with six speakers	
	•
2x front and 2x rear USB-C ports, 1x 12V socket	•
convenience	
Renault smart key with hands-free unlocking and walk-away locking	•
Auto door-lock when driving	•
Automatic windscreen wipers with rain sensor	•
Automatic dusk-sensing headlights	•
Automatic high/low beam	•
Four electric one-touch windows with anti-pinch	•
Electric parking brake with auto-hold function	•
Split folding rear bench seat 60:40	•
Sliding central front armrest with closed storage and rear air vents	•
LED Cabin lighting	•
Driver & front passenger sun visor with illuminated mirror	•
Customisable storage in centre console	•
Boot lighting	•
Charging cable storage in the boot	•
Heated power-adjustable and auto-fold door mirrors	-
Tyre repair kit	_
	•

04. equipment and options

TECHNO EV60 60kWh

	I ECHNO EVOU OUKWN
comfort	
Recycled fabric and leatherette upholstery with yellow contrast stitching	•
Heated front seats with 3 heat levels	•
Height-adjustable driver and passenger seat with electric lumbar adjustment for driver	•
Heated steering wheel	•
Automatic dual zone climate control system with air purifier	•
Welcome sequence	•
Multi-sense: customisation of driving modes (custom/comfort/sport/eco)	•
Interior ambient lighting with 48 available colours	•
'Living lights' - automatic ambient lighting colour change every 30 minutes	•
Rear privacy glass	
interior styling	
Recycled fabric dashboard cover	•
Black headlining	•
Yellow contrast stitching on the upholstery & front door armrests	•
Alcantara-style front door trims	
Chrome strips on dashboard, front & rear doors	
exterior styling	
20-inch soren two-tone alloy wheel rims	•
Shark fin antenna	
Two-tone paintwork	0
Automatic electric flush-fitting front door handles	•
Front/rear body-coloured F1-style blades	•
Striped exterior door protection	
electric	
Mode 3 charging cable (5m)	•
Regenerative braking (four levels) adjustable by paddle shifter on the steering wheel	
Charging scheduling via the openR multimedia system	•
Eco coaching - (driving tips to maximise your range and save energy)	•
options	
Metallic paint	0
Two-tone paintwork	0

ullet = Standard; \odot = Option; ^ compatibility may vary depending on phone.



For more information, call 1800 009 008 or visit www.renault.com.au. Details are correct at the time of publication and are subject to change. Vehicles depicted in this brochure are overseas models and are shown for illustration purposes only; Australian vehicles may differ in features, specifications, equipment, accessories and/or colour. RVDA Pty Ltd reserves the right to discontinue or change its models at its discretion and without prior notice, including features, specifications, equipment, accessories available and colour. The colours in the photographs may vary from actual colours. Please consult your Renault dealer for the latest information on models, features, specifications, prices, options and availability. Publication date - August 2023. RVDA Pty Ltd, 2A Hill Road, Lidcombe NSW 2141. REN1190

