
DEUTZ-FAHR 5D TTV SERIES

SPECIALIST RANGE

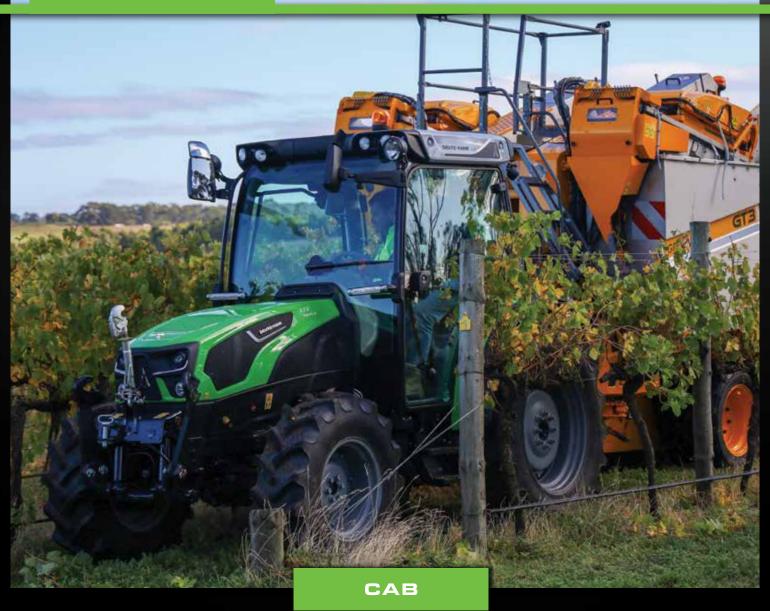

With unmatched versatility and class-beating technology, this is the ideal tractor for field work, as well as orchards, vineyards and municipal applications.

The remarkably compact 5D TTV is practically unlimited in configuration. Even better, such flexibility is backed by a rigid approach to safety, exemplified by 4 wheel braking, PowerZero function and a hydraulic park brake.

There is real grunt here, too, provided by a 113 hp 4 cylinder FARMotion common rail engine. These tractors feature TTV continuously variable transmission, spacious 4-pillar pressurised cab with a category 4 filtration system, and closed centre 100 l/min hydraulics. Only 1.8 metres wide, the 5D TTV's manoeuvrability is hard to beat.



5110.4D TTV

40км/н





TECHNICAL DATA & FEATURES	5110.4D TTV
POWER + PERFORMANCE	
Engine Type	Deutz-Fahr FARMotion
Emissions	Tier III
Cylinders / Capacity	4/3849
Aspiration	Turbo Intercooler
Max Power - ECER120 (kW/HP)	83/113
Max Torque (Nm)	435
Rated Engine Speed (rpm)	2200
Fuel Capacity (I)	115
DRIVE + HANDLING	
Gearbox Type and Gears	TTV Variable
Number of Gears	Infinite
Forward/Reverse Sense Clutch Shuttle	•
PowerZero Hill Control	
Min Speed (km/h)	0.02
Max Speed (km/h)	40 Eco
Front Axle Suspension	——————————————————————————————————————
4WD + 4 Wheel Diff Lock	•
Brakes (N0 / Type)	4/Independent Wet Disc
Wheel Size - Rear	Adjustable 380/85R30
Wheel Size - Front	Adjustable 320/85R20
PTO Type	Electro-Hyd Independent Wet Clutch
Speeds - Rear	540/540E/1000
LIFT + FLOW	
Туре	Closed Centre
Flow Rate (Type + I/min)	Electric/100
Remote Valves (Sets/Type)	3 Rear (3 Float / Detent / Kickout) Front (Optional)
Hydraulic Controllability (Flow/Timer)	Yes/Yes
3 Point Hitch Type	AGROTRONIC Electronic Hitch
Category	2
Hitch End Type	 Hook
Max Lift Capacity - Rear (kg)	4310
Front Linkage + PTO	Optional
COMFORT + CONVENIENCE	ориона.
Air-Conditioned Cabin	
Radio/MP3 Player	
Silent Block Cab Suspension	
CAT 4 Spray Cabin	
Cloth Driver Seat with Pneumatic Suspension	
Adjustable Steering Wheel	
InfoCentre Pro Dash	
MAX COM Armrest	
2 Engine Speed Programming Settings	
Hi Vis Rear Glass Roof	
Downswept Side Mounted Exhaust	4 Bonnet/6 Cabin
Worklights (No + Type) WEIGHTS + DIMENSIONS	4 DOTIFIEL/ O CADIN
	2271
Wheelbase (mm)	
Length (mm)	4060
Min Overall Width (mm)	1780
Cabin Width (mm)	1280
Height (mm)	2545
Weight (kg)	4058



FLAT PLATFORM CAT4 SPRAY CABIN



MAXCOM ARMREST CONTROL



CLOSED CENTRE 100L/MIN HYDRUALICS



FRONT LINKAGE & PTO AVAILABLE



INFOCENTRE PRODASH



■ Standard

