
# DEUTZ-FAHR AGROPLUS PROFILINE SERIES



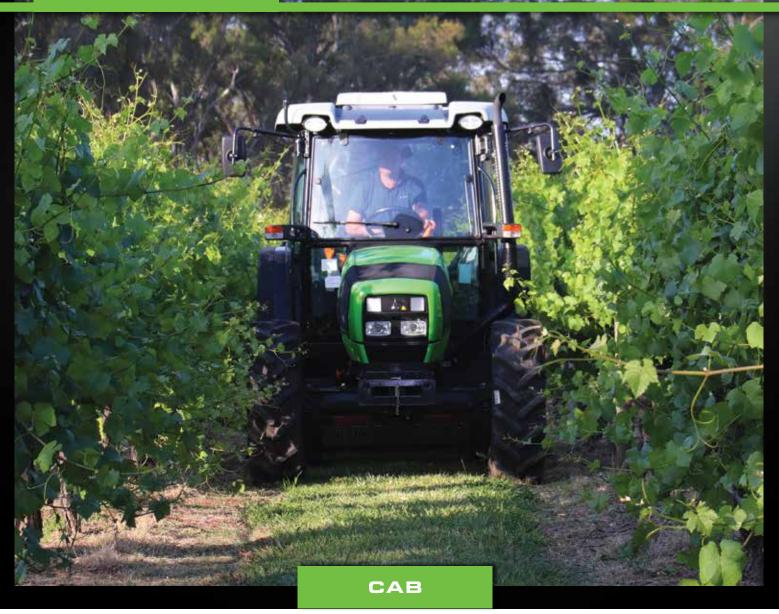

The Agroplus Profiline 420 is the complete package.

Reliable, competitively priced and economical to run, it is ideal as the main tractor in a small to medium farm, or as a specialised unit for vineyard or horticultural operations.

Its short wheelbase, impressive steering angle (55 degrees for 4WD versions) and minimum overall width of 1.65 metres make it the ideal choice for working in confined, maze-like spaces.

The Agroplus Profiline 420 also boasts an extraordinary weight/power ratio with a flat platform, making it one of the best choices available for specialised applications.



96 <sup>HP</sup>

AGROPLUS 420 PROFILINE 40KM/H



**PHONE** 1800 789 633



WE WORK BEYOND THE HORIZON.

#### **TECHNICAL DATA & FEATURES**

### **AGROPLUS 420 PROFILINE**

POWER + PERFORMANCE		
Engine Type	Deutz-Fahr - SDF 1000 Series	
Emissions	Tier III	
Cylinders / Capacity	4/4000	
Aspiration	Turbo Intercooler	
Max Power - 2000/25/EC (kW/HP)	72/96	
Max Torque <b>(Nm)</b>	373	
Rated Engine Speed (rpm)	2200	
Fuel Capacity (I)	90	

#### **DRIVE + HANDLING**

Gearbox Type and Gears	Wet Clutch Powershuttle (Sense Clutch)
Number of Gears	45/45
Powershift Speeds	3
Forward/Reverse Shuttle	
STOP & Go	
Min Speed <b>(km/h)</b>	0.18
Max Speed (km/h)	40 Eco
4WD + 4 Wheel Diff Lock	
Brakes (N0 / Type)	4/Independent Wet Disc
Wheel Size - Rear	Adjustable 380/85R30
Wheel Size - Front	Adjustable 320/85R20
РТО Туре	Electro-Hyd Independent Wet Clutch
Speeds - Rear	540/540E/1000

#### LIFT + FLOW

Hi Vis Roof

Туре	Open Centre
Flow Rate (I/min)	54 (Hyd) - 41 (Steering)
Remote Valves <b>(Sets/Type)</b>	3 / Spring / Detent / Float
Flow Control on Remote Valves	1 Valve
3 Point Hitch Type	Agrotronic Electronic Hitch
Category	2
Hitch End Type	Hook
Max Lift Capacity - Rear <b>(kg)</b>	3600
Front Linkage + PTO	Optional
COMFORT + CONVENIENCE	
Air-Conditioned Cabin	
Radio/MP3 Player	
Flat Floor	
Cloth Driver Seat with Pneumatic Suspension	
Adjustable Steering Wheel	
Display	Digital/Analogue
Engine Speed Programming	

eat with Pneumatic Suspension	
teering Wheel	
	Digital/Analogue
d Programming	
5	

2 Bonnet / 4 Cabin

## **Carbon Filters** Upswept Side Mounted Exhaust Worklights (No + Type) **WEIGHTS + DIMENSIONS**

#### Wheelbase (mm) 2230 Length (mm) 3955 Mid Overall Width (mm) 1760 (1650 achievable with 340/85R28) Height (mm) 2430 Weight (kg) 3600



FLAT PLATFORM CABIN









#### AGROTRONIC **ELECTRONIC HITCH**



SENSE CLUTCH POWERSHUTTLE



Standard

DEUTZ-FAHR PHONE 1800 789 633 VISIT WWW.DEUTZFAHR.COM.AU



Images for illustration purposes only. For exact specifications of advertised tractors, please consult your local Deutz-Fahr dealer. Specifications are accurate at the time of printing - August 2023.